



Trusted communication - anywhere





**Modem module**



**PSU module**

- **TSAT 3000 Remote**
- **IP67 Outdoor Rated Version**

# IP67 Rated Outdoor Version TSAT 3000

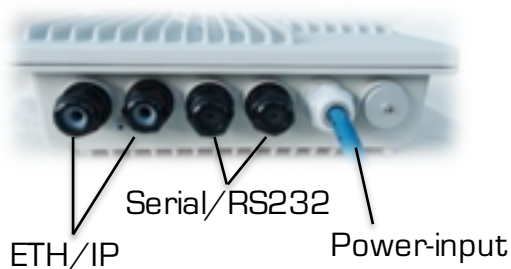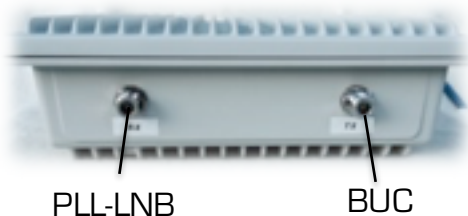

# IP67 Rated Outdoor Version

## TSAT 3000



Pole mount



Wall mount

### TSAT 3000 – IP67 features

- Enclosure construction is die cast alloy (AL-Si-Mg) with SurTEc surface treatment
- Operating temperature range is -40 to +60 C
- Enclosure protection rating is IP67 (NEMA 6) for complete protection against water ingress
- Enclosure dimensions are 310x310x90mm for satellite modem and 250x220x80mm for power supply module
- The enclosures are provided with pole (pipe) and wall (surface) mounting brackets
- The power source (24-48VDC) is terminated at power supply module via the included IP67 rated power connector
- The two (2) ETH/IP data connectors are provided with IP67 rated cable glands
- The two (2) Serial/RS232 connectors with IP67 rated cable glands
- Industrial Gore vent integration to equalize pressure and eliminate humidity inside the enclosure
- Power consumption with 3W BUC is 43W when TX, 26W with 10Mhz off and 11W with TX power off (RX only)



Trusted communication - anywhere